

Solid Ball Nose End Mill for
Machining Hardened Material
(Micro Solid Tools)

2KMB

Coating with Kyocera's Original Technology
MEGACOAT HARD EX Provides Long Tool Life,
High Quality and Stable Machining


A new lineup has been added to the K-series.
Solid tool for hardened material
supporting up to 70 HRC is now available!
Higher precision, larger variety.
New tools bring new innovation!
The K-series continues to overcome
numerous machining challenges.



Solid Ball Nose End Mill for Machining Hardened Material (Micro Solid Tools)

2KMB

Standard Type
Total 15 Items
R0.05 - R2.0



Long Neck Type
Total 109 Items
R0.05 - R2.0



Solving new challenges in solid tool machining

The new lineup of the K-series is an essential tool for precision parts and mold machining. Kyocera will expand the possibilities of solid tools and support your manufacturing.

Long Tool Life in Various Hardened Materials

Prehardened Steel
35 -45 HRC

Prehardened Steel
Hardened Steel
45 -55 HRC

Hardened Steel
55 -62 HRC


Hardened Steel
62 -66 HRC

Hardened Steel
66 -70 HRC

Compatible with a variety of hardened materials such as stainless steel, high-speed steel, etc., as well as alloy tool steel (~ 70 HRC)


Wear Resistance Comparison (Internal evaluation)

STAVAX (55HRC)

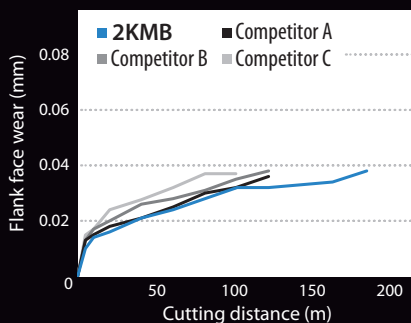


Cutting Conditions: $n = 20,000 \text{ min}^{-1}$, $V_f = 1,320 \text{ mm/min}$,
 $a_p \times a_e = 0.08 \times 0.2 \text{ mm}$, Wet (Mist) $\phi 2$

SKD11 (60HRC)

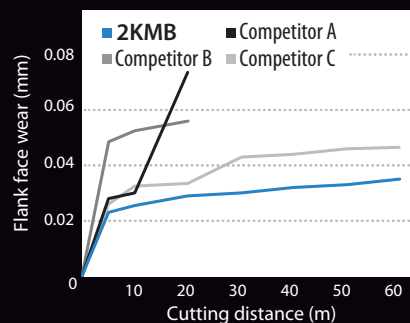

Cutting Conditions: $n = 16,900 \text{ min}^{-1}$, $V_f = 1,320 \text{ mm/min}$,
 $a_p \times a_e = 0.08 \times 0.2 \text{ mm}$, Wet (Mist) $\phi 2$

Powder high-speed steel (70HRC)

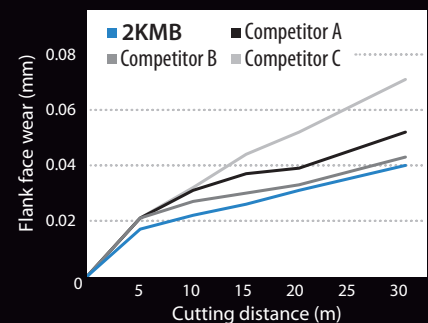


Cutting Conditions: $n = 13,700 \text{ min}^{-1}$, $V_f = 1,190 \text{ mm/min}$,
 $a_p \times a_e = 0.08 \times 0.2 \text{ mm}$, Wet (Mist) $\phi 2$

Experience the Excellent Finish


The new MEGACOAT HARD EX coating technology and a unique shape creates a glossy and beautiful finished surface
Reduced process cycle times

Surface Finish Condition (Internal evaluation)

Cutting Conditions: $n = 18,000 \text{ min}^{-1}$,
 $V_f = 1,600 \text{ mm/min}$,
 $a_p \times a_e = 0.1 \times 0.15 \text{ mm}$,
Wet (Mist)
 $\phi 2.5$ (Long Neck Type)
Powder high-speed steel (70 HRC)

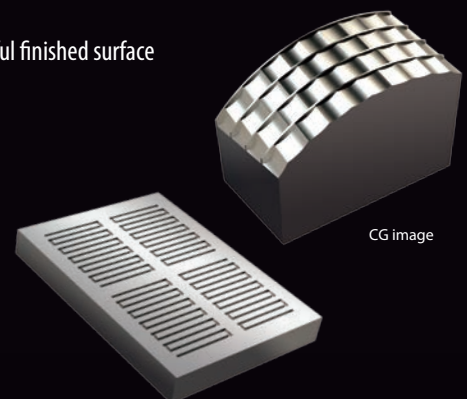

INNOVATIVE

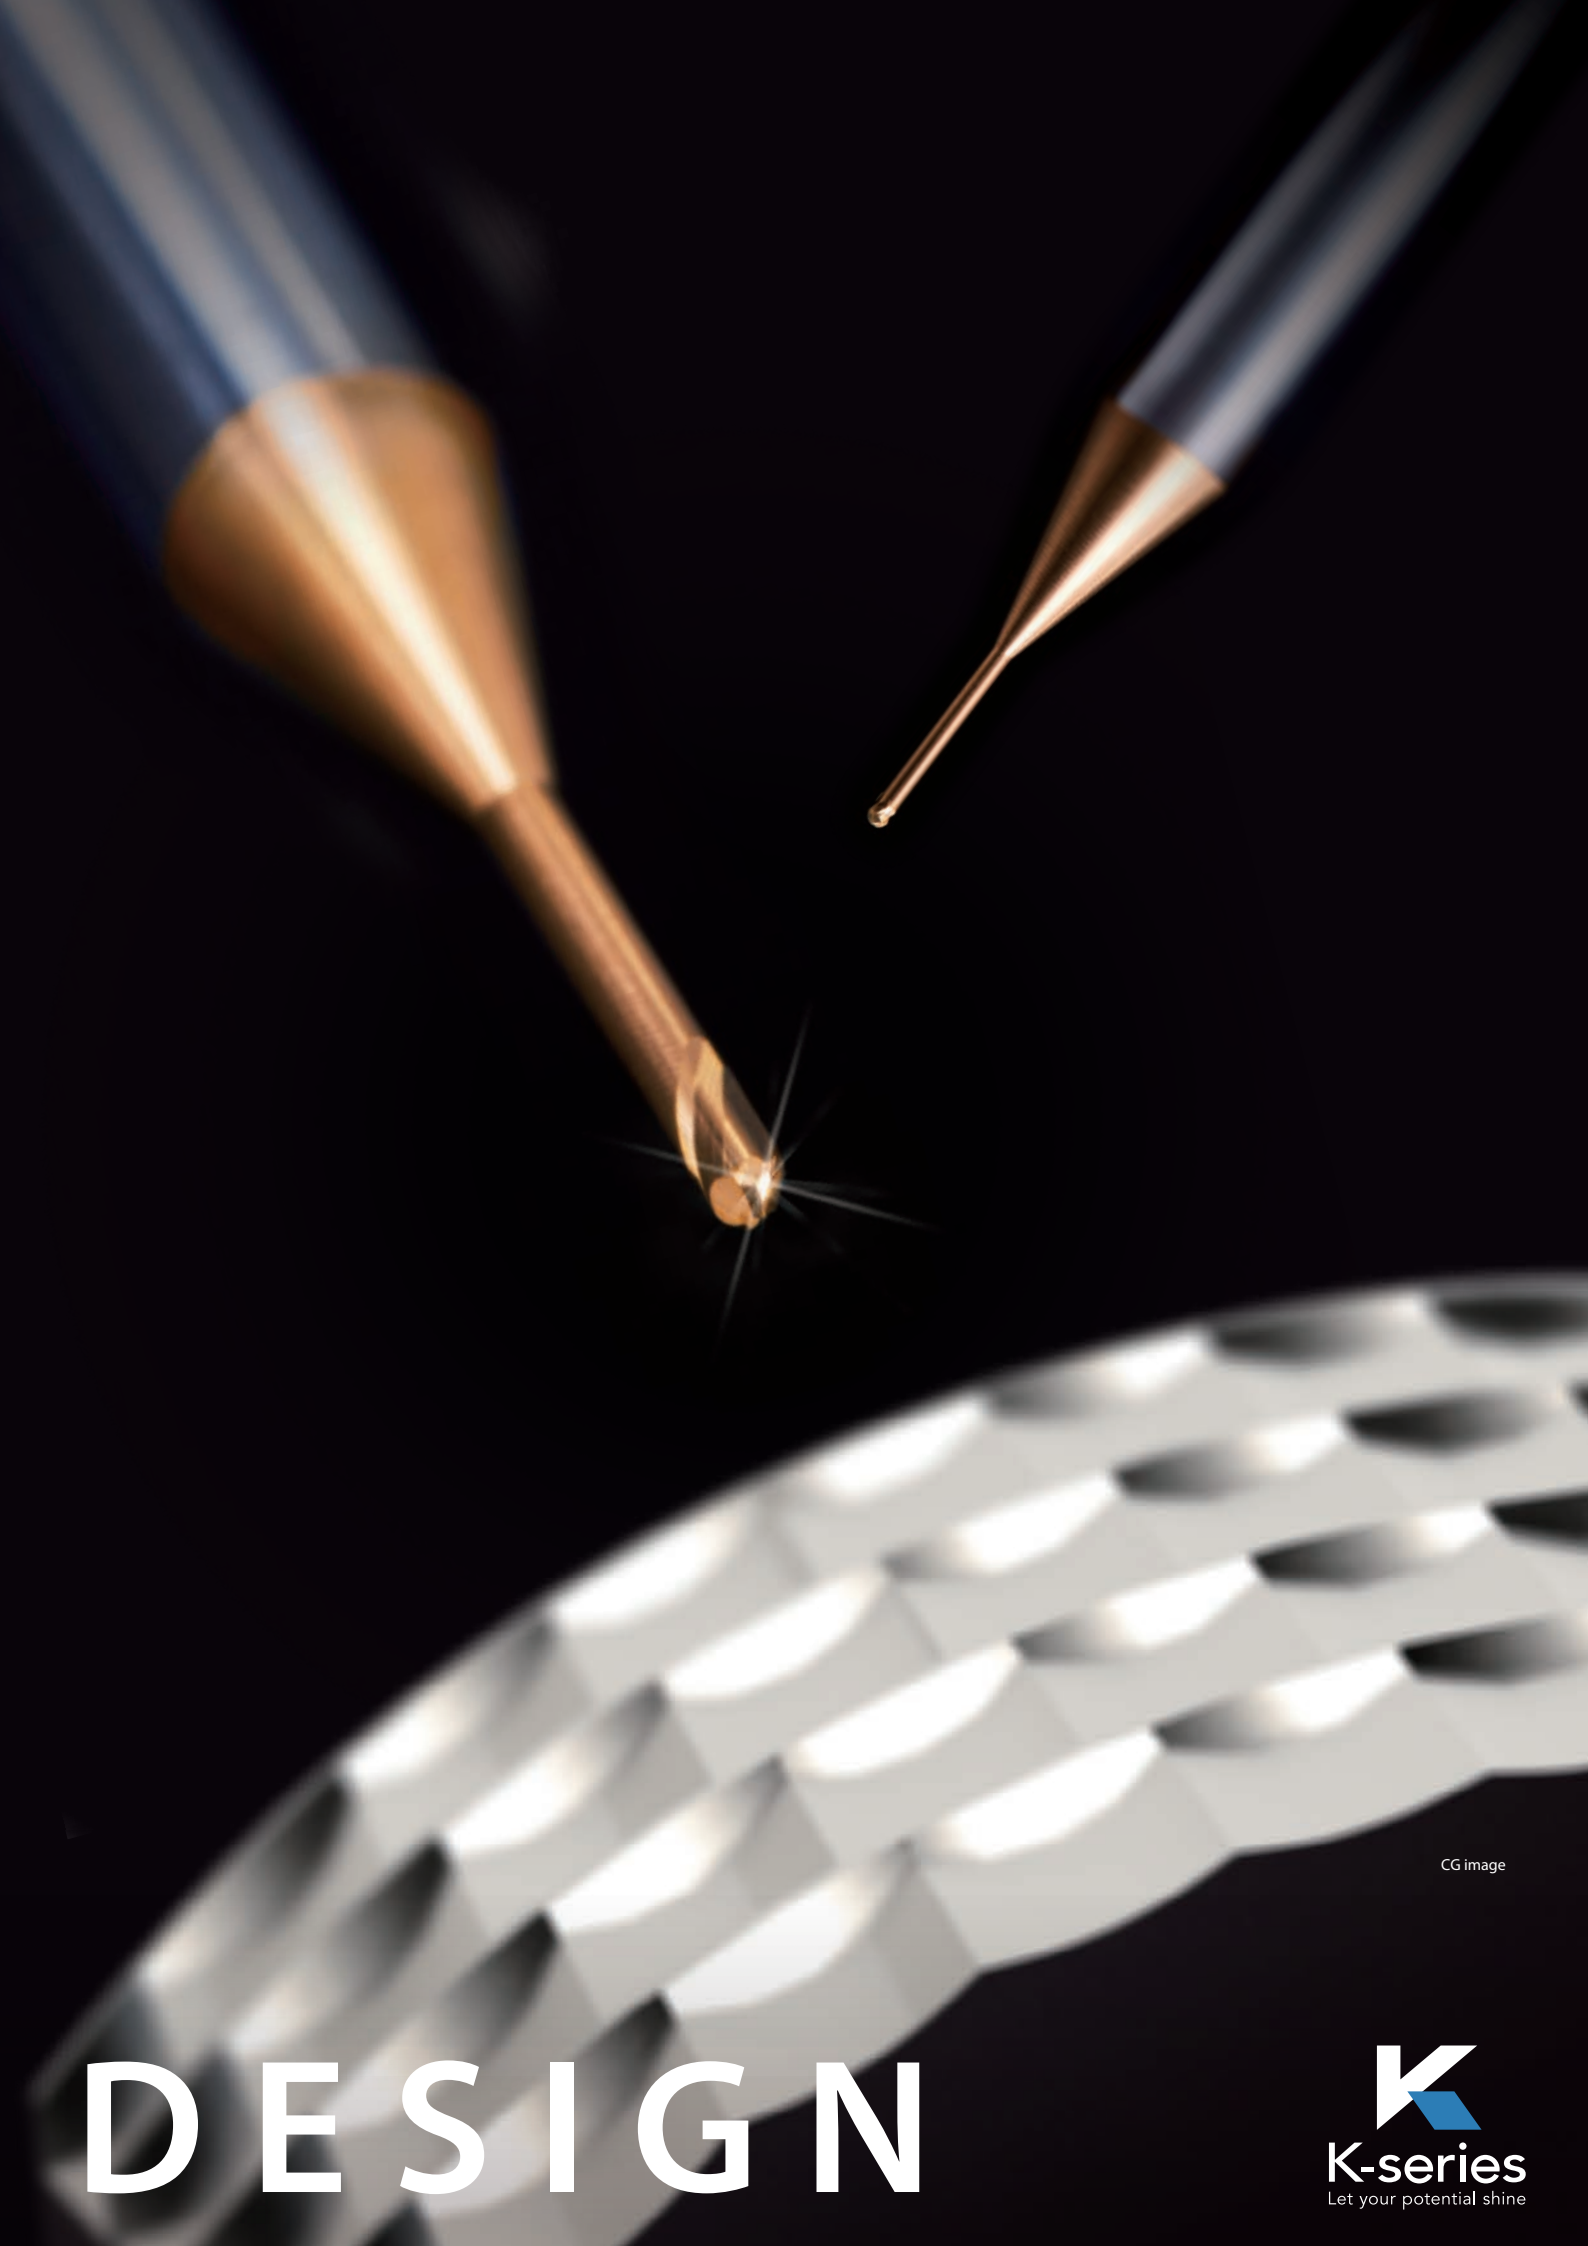

CG image

DESIGN



Long Tool Life with Unique Coating




New PVD Coating **NEW**

MEGACOAT HARD EX

Kyocera's Original New Coating MEGACOAT HARD Enables Long Tool Life for Various Hardened Materials.

Advanced Technology from Kyocera Uses a Special Two-layer Structure with both Chipping Resistance and Abrasion Resistance

Section view

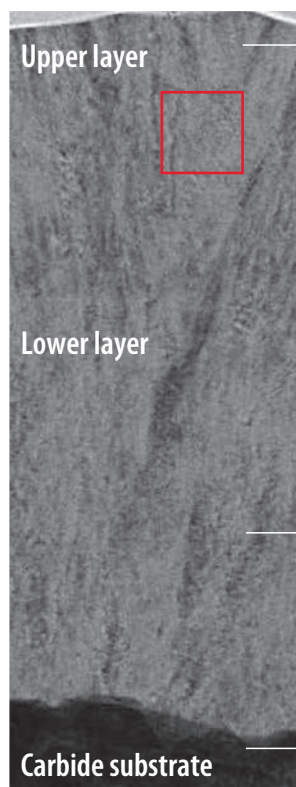

Chipping Suppression

High-toughness Crystalline Layer



- Unique structure for high shock resistance
- Toughness improvement by controlling internal stress and crystal growth direction

Suppresses the progression of high-temperature wear


Special Laminated Structural Layer

- High hardness
- Excellent oxidation resistance and unique composition design with high lubricity

Suppresses hard film peeling


Special Interface Treatment

Coating Properties

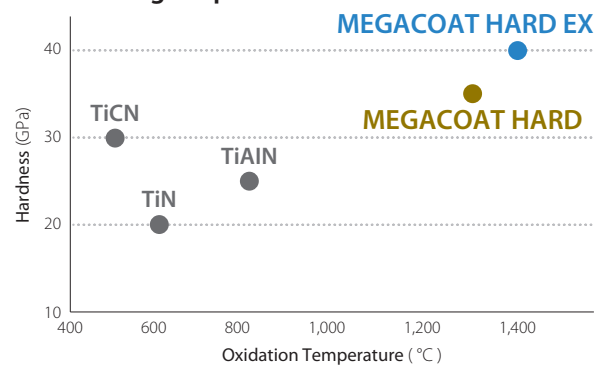


Wear Resistance Comparison (Internal evaluation)

R Recession after 500 mm machining

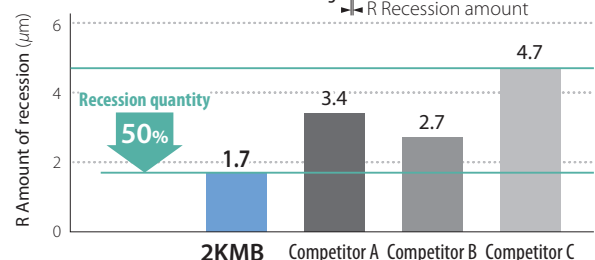

Cutting Conditions: $n = 40,000 \text{ min}^{-1}$, $V_f = 70 \text{ mm/min}$, $ap \times ae = 0.003 \times 0.005 \text{ mm}$, Wet (Oil-based) Shouldering SKD 11 (60HRC) $\phi 0.1$ (Long neck type)

Unique Shape Controls Hardened Material

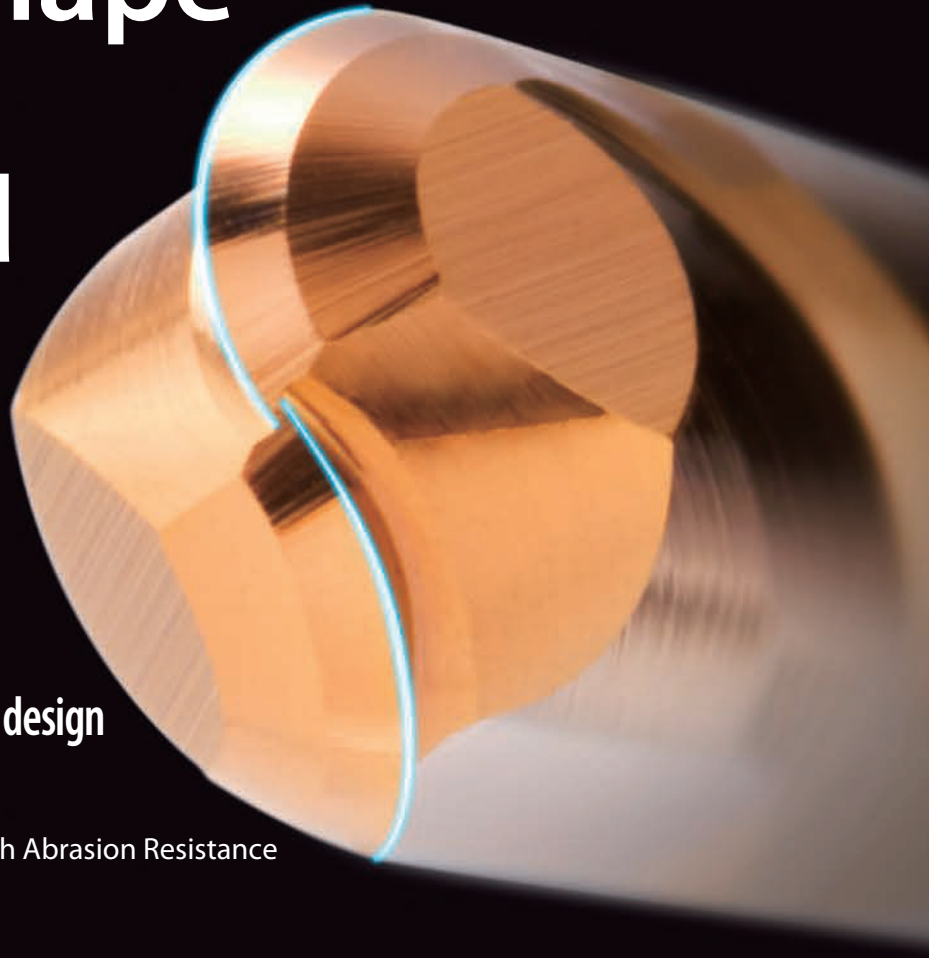

Point

01

**High Quality
with an S-shaped flute design**

Excellent Sharpness

High Quality Finish and High Abrasion Resistance

Point

02

**High Rigidity
with a Large Core Thickness**

Ensures High Rigidity and Stable Machining

Ball Section Comparison
(Internal evaluation)
Outer diameter $\phi 1$

Product Cross-section

18%



2KMB


Competitor A

Point

03

**Low Resistance
with a Strong Back Taper**

Chatter Resistant Point Design
Improves Finished Surface Quality and
Reduction of Inclination

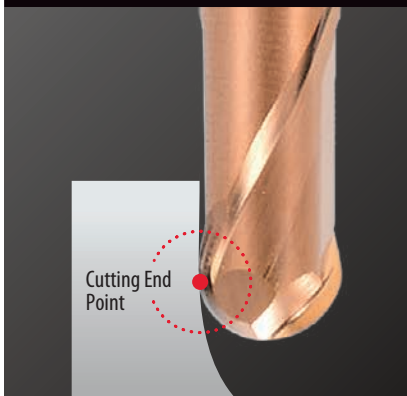


Cutting End Point

Point

04

**Stable machining
with a unique cutting
edge shape**


Simultaneous Cutting Edge Strength
and Low Resistance
Achieves Stable Machining and
High-quality Finished Surfaces

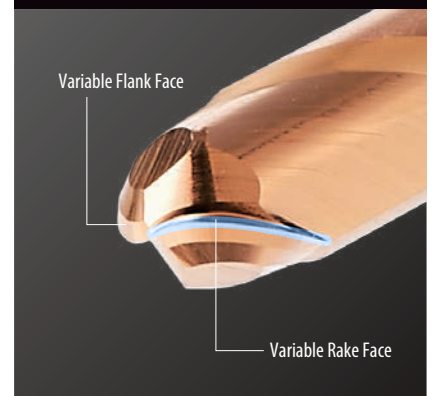

Variable Flank Face

Variable Rake Face

80° Slope Half Pocketing




2KMBL0200-0800-S4 Tool diameter DC ø2 Long neck type
SKD11 (60HRC)

	n (min ⁻¹)	Vf (mm/min)	ap×ae (mm)	Coolant
Wall Finishing	10,000	400	0.02×0.02	Wet (Mist)
Bottom Finishing	10,000	400	0.02×0.02	Wet (Mist)

Provides an excellent surface finish that is resistant to deflection even when machining at large depths


Long tool life with stable cuts and uniform finish is possible

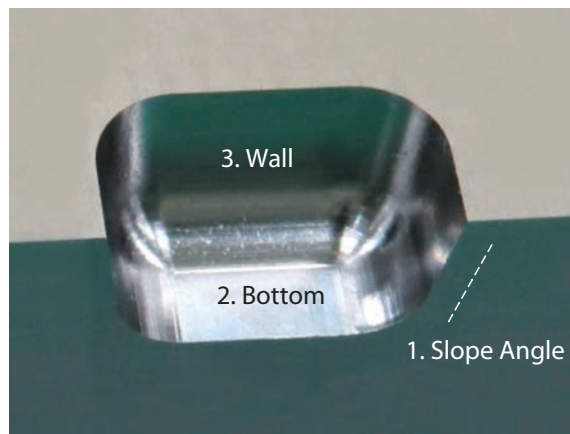

01

Machining Accuracy



2KMB shows smaller deflection and higher precision machining than competitors.

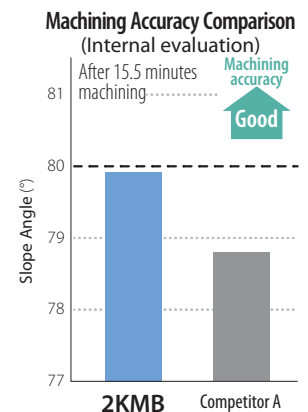

02

Machining Quality



2KMB shows a better surface and superior surface finish than competitors.

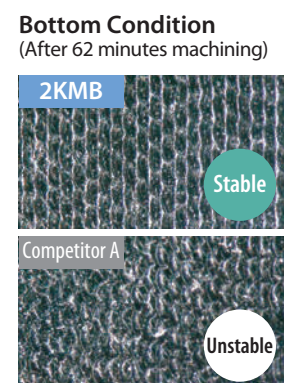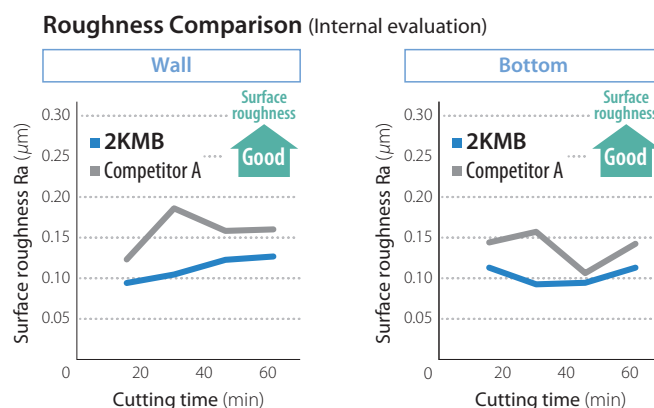


03

Tool Life

2KMB shows smaller wear with higher wear resistance than competitors.

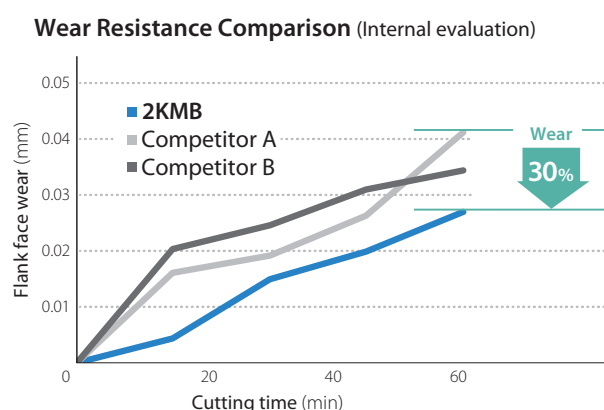


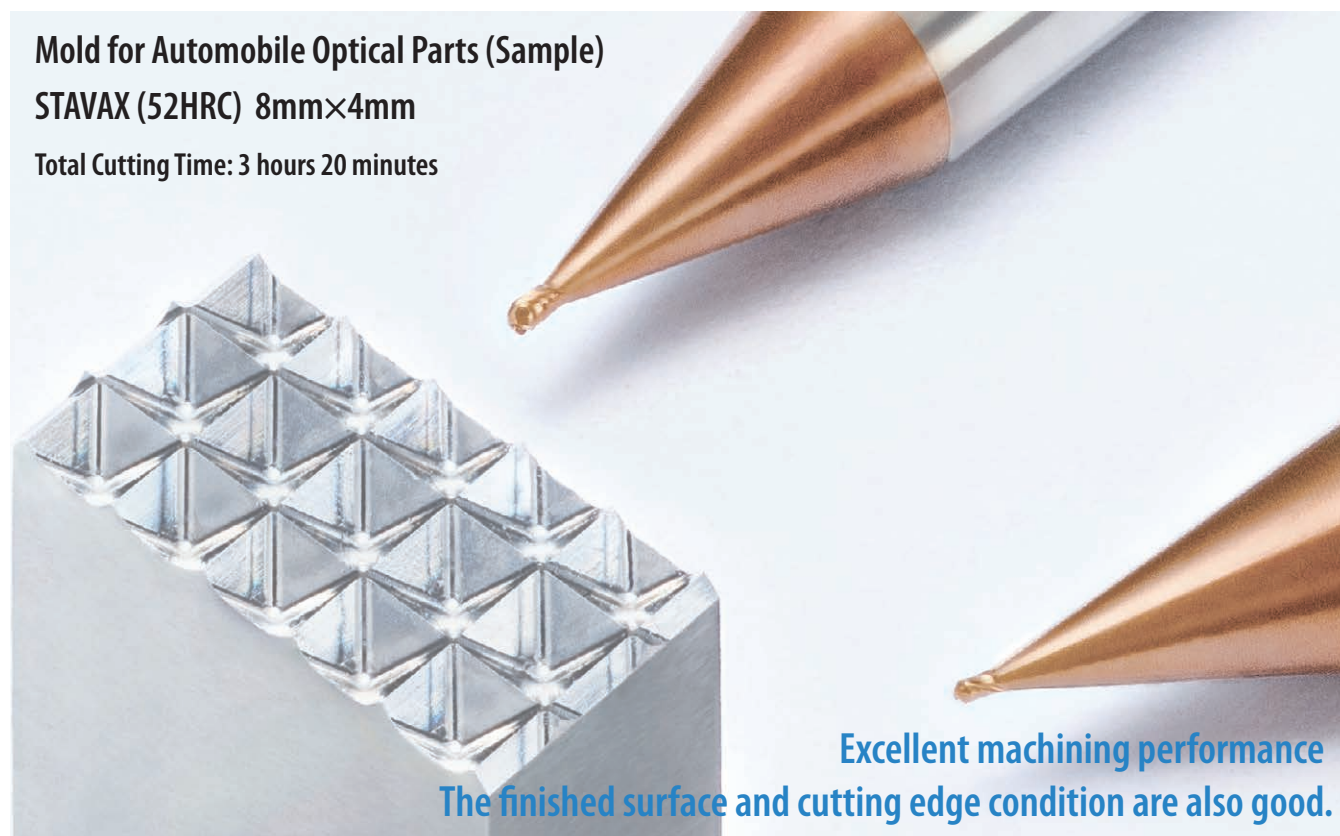

Cutting Conditions

	Roughing	Roughing	Medium Roughing	Medium Roughing	Medium Finishing	Finishing
Tool	R0.5 Radius	R0.3 2KMB0060-0090-S4		R0.2 2KMB0040-0060-S4	R0.2 2KMB0040-0060-S4	R0.2 2KMB0040-0060-S4
No. of Revolutions n (min ⁻¹)	15,000	15,000	18,000	18,000	18,000	18,000
Vf (mm/min)	600	300	300	150	150	150
ap (mm)	0.035	0.025	0.03	0.02	0.01	0.005
Thickness (mm)	0.2	0.2	0.1	0.1	0.05	0
Cutting Time (min)	8	18	9	21	46	49 x 2 pcs

Finished Surface

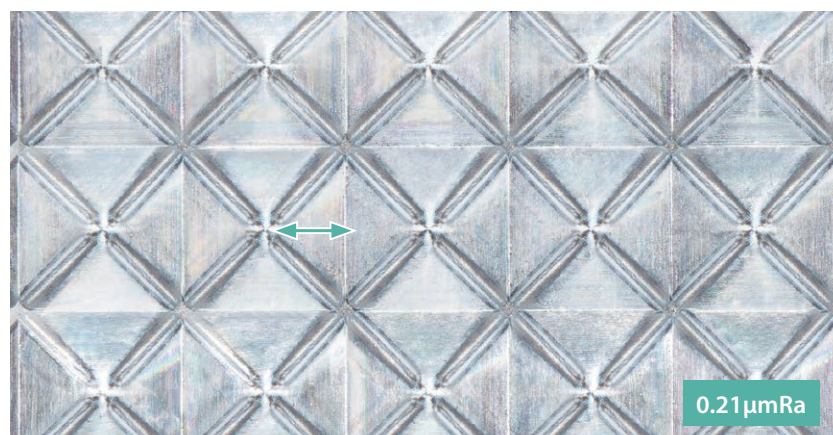

Edge Condition


Roughing and Medium Roughing R0.3



Finishing R0.2



Standard Type

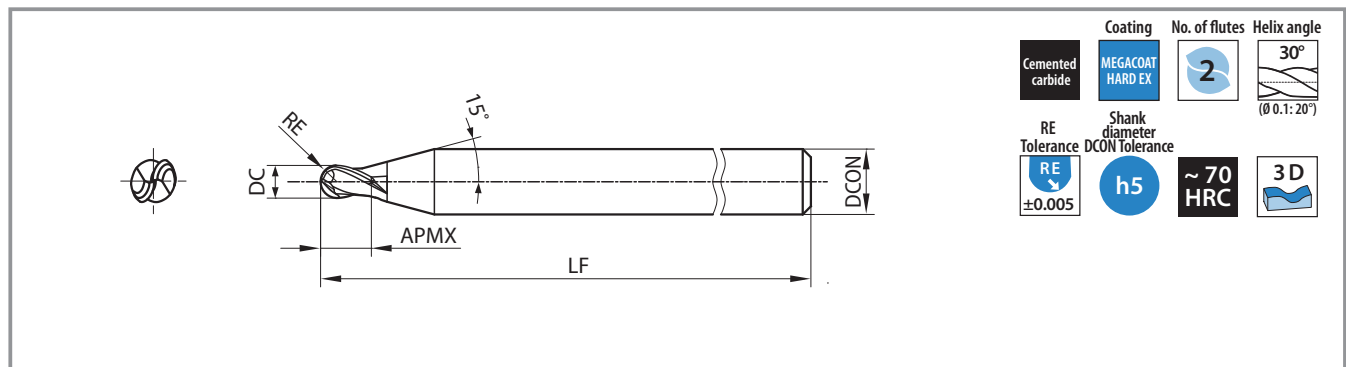

Description	Stock	Dimensions (mm)				
		RE	DC	APMX	DCON	LF
2KMB0010-0010-S4	●	R0.05	0.1	0.1	4	50
2KMB0015-0015-S4	●	R0.075	0.15	0.15	4	50
2KMB0020-0020-S4	●	R0.1	0.2	0.2	4	50
2KMB0030-0030-S4	●	R0.15	0.3	0.3	4	50
2KMB0040-0060-S4	●	R0.2	0.4	0.6	4	50
2KMB0050-0080-S4	●	R0.25	0.5	0.8	4	50
2KMB0060-0090-S4	●	R0.3	0.6	0.9	4	50
2KMB0080-0120-S4	●	R0.4	0.8	1.2	4	50
2KMB0100-0150-S4	●	R0.5	1	1.5	4	50
2KMB0150-0230-S4	●	R0.75	1.5	2.3	4	50
2KMB0200-0300-S4	●	R1	2	3	4	60
2KMB0250-0380-S6	●	R1.25	2.5	3.8	6	60
2KMB0300-0500-S6	●	R1.5	3	5	6	60
2KMB0400-0600-S4	●	R2	4	6	4	70
2KMB0400-0600-S6	●	R2	4	6	6	70

The ball radius is based on 1/2 of the actual outer diameter.

Neck angle is a reference value.

Standard type is not a strong back taper shape.


● : Standard Stock

Description's View

Example: 2KMBL0100-0500-S4

2KMB	L	0100	-	0500	-	S4
Product Name For Precision Die (Fine Machining) Solid Ball Nose End Mill 2-Flute	Type None: Standard Type L: Long Neck Type	Outer Diameter DC ø1.0		Standard Type: Flute Length (APMX) Long Neck Type: Length Under Neck (LU) 0500 : LU 5mm		Shank Diameter DCON ø 4.0

Long Neck Type

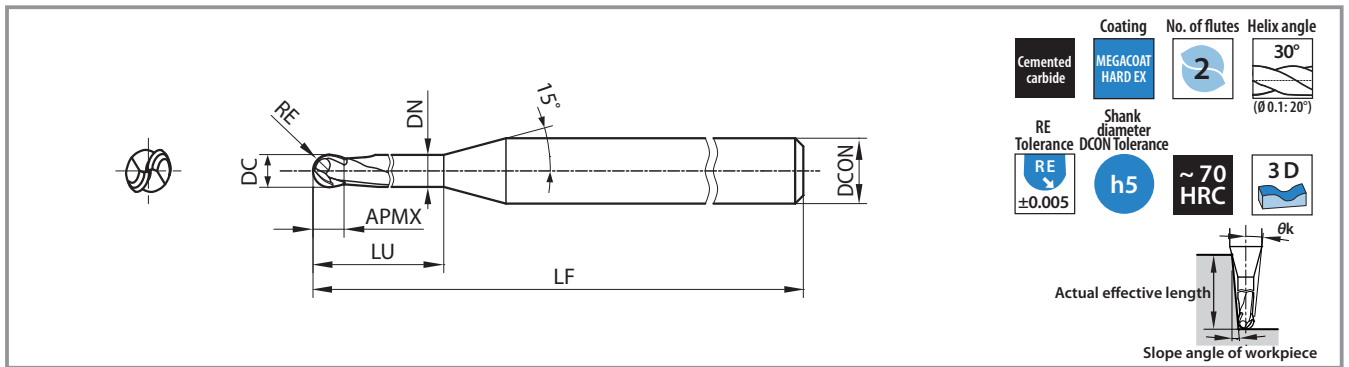


Description	Stock	Dimensions (mm)							Interference Angle θk	Actual effective length for slope angle of workpiece				
		RE	DC	APMX	LU	DN	DCON	LF		0.5°	1°	1.5°	2°	3°
2KMBL0010-0020-S4	●	R0.05	0.1	0.07	0.2	0.09	4	45	14.68°	0.22	0.23	0.23	0.24	0.25
2KMBL0010-0030-S4	●				0.3				14.49°	0.32	0.33	0.34	0.35	0.38
2KMBL0010-0050-S4	●				0.5				14.13°	0.53	0.55	0.56	0.58	0.63
2KMBL0015-0030-S4	●	R0.075	0.15	0.1	0.3	0.14	4	45	14.53°	0.32	0.33	0.34	0.35	0.37
2KMBL0015-0050-S4	●				0.5				14.17°	0.53	0.54	0.56	0.58	0.62
2KMBL0015-0100-S4	●				1				13.33°	1.05	1.08	1.12	1.16	1.24
2KMBL0020-0030-S4	●	R0.1	0.2	0.15	0.3	0.19	4	45	14.58°	0.32	0.33	0.34	0.35	0.37
2KMBL0020-0050-S4	●				0.5				14.2°	0.53	0.54	0.56	0.58	0.62
2KMBL0020-0075-S4	●				0.75				13.76°	0.79	0.81	0.84	0.86	0.93
2KMBL0020-0100-S4	●				1				13.35°	1.04	1.08	1.11	1.15	1.24
2KMBL0020-0125-S4	●				1.25				12.96°	1.3	1.35	1.39	1.44	1.55
2KMBL0020-0150-S4	●				1.5				12.59°	1.56	1.61	1.67	1.73	1.86
2KMBL0030-0050-S4	●	R0.15	0.3	0.2	0.5	0.29	4	45	14.28°	0.53	0.54	0.55	0.57	0.6
2KMBL0030-0060-S4	●				0.6				14.09°	0.63	0.65	0.66	0.68	0.73
2KMBL0030-0075-S4	●				0.75				13.82°	0.78	0.81	0.83	0.86	0.91
2KMBL0030-0100-S4	●				1				13.39°	1.04	1.07	1.11	1.14	1.22
2KMBL0030-0125-S4	●				1.25				12.99°	1.3	1.34	1.38	1.43	1.54
2KMBL0030-0150-S4	●				1.5				12.61°	1.56	1.61	1.66	1.72	1.85
2KMBL0030-0175-S4	●				1.75				12.25°	1.82	1.88	1.94	2.01	2.16
2KMBL0030-0200-S4	●				2				11.91°	2.08	2.14	2.22	2.29	2.47
2KMBL0040-0050-S4	●	R0.2	0.4	0.3	0.5	0.39	4	45	14.35°	0.52	0.54	0.55	0.56	0.59
2KMBL0040-0080-S4	●				0.8				13.79°	0.83	0.86	0.88	0.91	0.96
2KMBL0040-0100-S4	●				1				13.44°	1.04	1.07	1.1	1.14	1.21
2KMBL0040-0150-S4	●				1.5				12.63°	1.56	1.61	1.66	1.71	1.83
2KMBL0040-0200-S4	●				2				11.91°	2.07	2.14	2.21	2.29	2.46
2KMBL0040-0250-S4	●				2.5				11.27°	2.59	2.68	2.76	2.86	3.08
2KMBL0040-0300-S4	●				3				10.69°	3.11	3.21	3.32	3.44	3.7
2KMBL0050-0100-S4	●	R0.25	0.5	0.35	1	0.49	4	45	13.49°	1.04	1.07	1.1	1.13	1.2
2KMBL0050-0150-S4	●				1.5				12.65°	1.56	1.6	1.65	1.7	1.82
2KMBL0050-0200-S4	●				2				11.91°	2.07	2.14	2.21	2.28	2.44
2KMBL0050-0250-S4	●				2.5				11.25°	2.59	2.67	2.76	2.85	3.07
2KMBL0050-0300-S4	●				3				10.66°	3.11	3.21	3.31	3.43	3.69
2KMBL0050-0350-S4	●				3.5				10.13°	3.62	3.74	3.87	4	4.31
2KMBL0050-0400-S4	●				4				9.65°	4.14	4.28	4.42	4.58	4.93

The ball radius is based on 1/2 of the actual outer diameter.
Neck angle is a reference value.
Be careful not to interfere with the workpiece.

●: Standard Stock

Long Neck Type

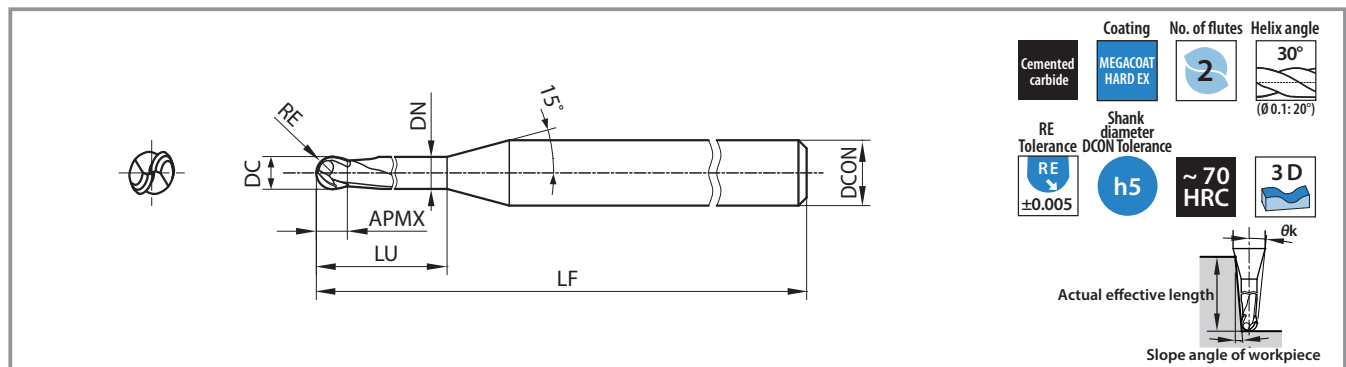

Description	Stock	Dimensions (mm)							Interference Angle θk	Actual effective length for slope angle of workpiece				
		RE	DC	APMX	LU	DN	DCON	LF		0.5°	1°	1.5°	2°	3°
2KMBL0060-0100-S4	●	R0.3	0.6	0.45	1	0.59	4	45	13.54°	1.04	1.06	1.09	1.12	1.19
2KMBL0060-0150-S4	●				1.5				12.67°	1.55	1.6	1.65	1.7	1.81
2KMBL0060-0200-S4	●				2				11.91°	2.07	2.13	2.2	2.27	2.43
2KMBL0060-0250-S4	●				2.5				11.23°	2.59	2.67	2.75	2.85	3.05
2KMBL0060-0300-S4	●				3				10.63°	3.11	3.2	3.31	3.42	3.67
2KMBL0060-0350-S4	●				3.5				10.08°	3.62	3.74	3.86	4	4.3
2KMBL0060-0400-S4	●				4				9.59°	4.14	4.27	4.42	4.57	4.92
2KMBL0060-0450-S4	●				4.5				9.15°	4.66	4.81	4.97	5.15	5.54
2KMBL0060-0500-S4	●				5				8.74°	5.17	5.34	5.52	5.72	6.16
2KMBL0070-0200-S4	●	R0.35	0.7	0.5	2	0.69	4	45	11.91°	2.07	2.13	2.19	2.26	2.42
2KMBL0070-0400-S4	●				4				9.54°	4.14	4.27	4.41	4.56	4.91
2KMBL0080-0200-S4	●	R0.4	0.8	0.6	2	0.78	4	45	11.88°	2.09	2.15	2.21	2.28	2.43
2KMBL0080-0300-S4	●				3				10.53°	3.12	3.22	3.32	3.43	3.67
2KMBL0080-0400-S4	●				4				9.46°	4.15	4.29	4.43	4.58	4.92
2KMBL0080-0500-S4	●				5				8.58°	5.19	5.36	5.53	5.73	6.16
2KMBL0080-0600-S4	●	R0.45	0.9	0.65	6	0.88	4	45	7.85°	6.22	6.43	6.64	6.88	7.4
2KMBL0090-0200-S4	●				2				11.88°	2.09	2.14	2.2	2.27	2.42
2KMBL0090-0400-S4	●				4				9.4°	4.15	4.28	4.42	4.57	4.9
2KMBL0090-0600-S4	●				6				7.77°	6.22	6.42	6.64	6.87	7.39
2KMBL0100-0200-S4	●	R0.5	1	0.75	2	0.98	4	45	11.88°	2.08	2.14	2.2	2.26	2.41
2KMBL0100-0250-S4	●				2.5				11.12°	2.6	2.67	2.75	2.84	3.03
2KMBL0100-0300-S4	●				3				10.45°	3.12	3.21	3.31	3.41	3.65
2KMBL0100-0400-S4	●				4				9.33°	4.15	4.28	4.42	4.56	4.89
2KMBL0100-0500-S4	●				5				8.42°	5.19	5.35	5.52	5.71	6.14
2KMBL0100-0600-S4	●				6				7.68°	6.22	6.42	6.63	6.86	7.38
2KMBL0100-0700-S4	●	R0.6	1.2	0.9	7	1.18	4	45	7.05°	7.25	7.49	7.74	8.01	8.62
2KMBL0120-0240-S4	●				2.4				11.22°	2.49	2.56	2.63	2.71	2.88
2KMBL0120-0400-S4	●				4				9.19°	4.15	4.27	4.4	4.55	4.87
2KMBL0120-0600-S4	●				6				7.49°	6.22	6.41	6.62	6.85	7.35
2KMBL0120-0800-S4	●	R0.7	1.4	1	8	1.37	4	45	6.31°	8.28	8.55	8.84	9.15	9.84
2KMBL0140-0800-S4	●				12				6.08°	8.3	8.56	8.85	9.15	9.84
2KMBL0140-1200-S4	●				12			50	4.59°	12.43	12.84	13.28	13.75	14.81

The ball radius is based on 1/2 of the actual outer diameter.

Neck angle is a reference value.

Be careful not to interfere with the workpiece.

● : Standard Stock

Description	Stock	Dimensions (mm)							Interference Angle	Actual effective length for slope angle of workpiece				
		RE	DC	APMX	LU	DN	DCON	LF		θk	0.5°	1°	1.5°	2°
2KMBL0150-0300-S4	●	R0.75	1.5	1.1	3	1.47	4	45	10.17°	3.13	3.21	3.3	3.4	3.61
2KMBL0150-0400-S4	●				4				8.92°	4.16	4.28	4.41	4.55	4.85
2KMBL0150-0600-S4	●				6				7.15°	6.23	6.42	6.63	6.85	7.34
2KMBL0150-0800-S4	●				8				5.97°	8.3	8.56	8.84	9.15	9.83
2KMBL0150-1000-S4	●				10				5.12°	10.36	10.7	11.06	11.45	12.31
2KMBL0150-1200-S4	●				12				4.48°	12.43	12.84	13.28	13.75	14.8
2KMBL0160-0800-S4	●	R0.8	1.6	1.2	8	1.57	4	45	5.84°	8.3	8.56	8.84	9.14	9.82
2KMBL0160-1200-S4	●				12				4.37°	12.43	12.84	13.27	13.74	14.79
2KMBL0200-0300-S4	●	R1	2	1.5	3	1.97	4	45	9.81°	3.12	3.19	3.27	3.36	3.55
2KMBL0200-0400-S4	●				4				8.39°	4.15	4.26	4.38	4.51	4.79
2KMBL0200-0600-S4	●				6				6.5°	6.22	6.4	6.6	6.81	7.28
2KMBL0200-0800-S4	●				8				5.3°	8.29	8.54	8.82	9.11	9.77
2KMBL0200-1000-S4	●				10				4.48°	10.36	10.68	11.03	11.41	12.25
2KMBL0200-1200-S4	●				12				3.87°	12.42	12.82	13.25	13.71	14.74
2KMBL0200-1300-S4	●				13				3.63°	13.46	13.89	14.36	14.86	15.98
2KMBL0200-1400-S4	●				14				3.41°	14.49	14.96	15.47	16.01	17.23
2KMBL0200-1600-S4	●				16			3.05°	16.56	17.1	17.68	18.31	19.71	
2KMBL0250-0600-S4	●				R1.25			2.5	2.3	6	2.45	4	45	5.61°
2KMBL0250-0800-S4	●	8	4.45°	8.32		8.57	8.83			9.11				9.75
2KMBL0250-1000-S4	●	10	3.69°	10.39		10.7	11.05			11.41				12.24
2KMBL0250-1500-S4	●	15	2.59°	15.55		16.05	16.59			17.16			-	
2KMBL0250-2000-S4	●	20	1.99°	20.72		21.4	22.13			-			-	
2KMBL0300-0600-S6	●	R1.5	3	2.5	6	2.9	6	60	8.3°	6.34	6.51	6.69	6.88	7.32
2KMBL0300-0800-S6	●				8				6.97°	8.41	8.65	8.91	9.18	9.81
2KMBL0300-1000-S6	●				10				6°	10.47	10.79	11.12	11.48	12.29
2KMBL0300-1200-S6	●				12				5.27°	12.54	12.93	13.34	13.78	14.78
2KMBL0300-1400-S6	●				14				4.69°	14.61	15.07	15.56	16.08	17.27
2KMBL0300-1600-S6	●				16				4.23°	16.68	17.21	17.77	18.38	19.75
2KMBL0300-2000-S6	●				20			3.54°	20.81	21.48	22.21	22.98	24.73	
2KMBL0300-2500-S6	●				25			2.94°	25.98	26.83	27.75	28.73	-	
2KMBL0350-1500-S6	●	R1.75	3.5	2.8	15	3.4	6	60	3.96°	15.63	16.12	16.64	17.2	18.45
2KMBL0350-2000-S6	●				20			65	3.1°	20.8	21.47	22.18	22.94	24.66
2KMBL0350-2500-S6	●				25			70	2.55°	25.97	26.81	27.72	28.69	-
2KMBL0350-3000-S6	●				30			75	2.17°	31.14	32.16	33.26	34.44	-
2KMBL0400-0800-S6	●	R2	4	3	8	3.9	6	65	5.76°	8.39	8.61	8.85	9.11	9.69
2KMBL0400-1000-S6	●				10				4.8°	10.46	10.75	11.07	11.41	12.17
2KMBL0400-1200-S6	●				12				4.11°	12.52	12.89	13.28	13.71	14.66
2KMBL0400-1400-S6	●				14				3.6°	14.59	15.03	15.5	16.01	17.14
2KMBL0400-1500-S6	●				15				3.39°	15.63	16.1	16.61	17.16	18.39
2KMBL0400-2000-S6	●				20				2.62°	20.79	21.45	22.15	22.91	-
2KMBL0400-2500-S6	●				25			2.13°	25.96	26.8	27.69	28.66	-	
2KMBL0400-3000-S6	●				30			1.8°	31.13	32.15	33.23	-	-	
2KMBL0400-3500-S6	●				35			1.56°	36.3	37.49	38.78	-	-	

The ball radius is based on 1/2 of the actual outer diameter.
Neck angle is a reference value.
Be careful not to interfere with the workpiece.

● : Standard Stock

Reference Cutting Conditions Table

Standard Type

		Prehardened steel NAK(35-45HRC)				Prehardened steel/Hardened steel STAVAX · SKD61(45-55HRC)				Hardened steel SKD11(55-62HRC)				Hardened steel Powder high-speed steel · SKH (62-66HRC)				Hardened steel Powder high-speed steel (66-70HRC)			
Ball Radius RE (mm)	Flute Length APMX (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)
R0.05	0.1	50,000	200	0.008	0.008	40,000	170	0.006	0.006	40,000	110	0.003	0.006	40,000	70	0.002	0.006	40,000	60	0.002	0.003
R0.075	0.15	50,000	280	0.008	0.008	40,000	200	0.006	0.006	40,000	170	0.003	0.006	40,000	110	0.002	0.006	40,000	90	0.002	0.003
R0.1	0.2	50,000	330	0.015	0.031	40,000	400	0.011	0.022	40,000	350	0.011	0.011	40,000	260	0.003	0.006	40,000	170	0.003	0.003
R0.15	0.3	50,000	770	0.015	0.046	40,000	460	0.011	0.033	40,000	400	0.011	0.022	40,000	330	0.006	0.011	40,000	200	0.003	0.006
R0.2	0.6	50,000	800	0.031	0.092	40,000	1,100	0.022	0.066	40,000	900	0.022	0.055	40,000	530	0.011	0.022	35,000	460	0.01	0.022
R0.25	0.8	50,000	1,150	0.046	0.108	40,000	1,300	0.033	0.077	40,000	1,100	0.028	0.055	40,000	660	0.017	0.033	30,000	500	0.011	0.022
R0.3	0.9	50,000	1,950	0.077	0.154	40,000	1,760	0.055	0.11	40,000	1,320	0.033	0.066	30,000	790	0.022	0.055	25,000	590	0.022	0.055
R0.4	1.2	50,000	2,400	0.154	0.231	40,000	2,400	0.11	0.165	40,000	2,000	0.077	0.11	30,000	1,320	0.055	0.11	25,000	990	0.033	0.11
R0.5	1.5	45,000	3,000	0.154	0.462	40,000	2,750	0.11	0.33	30,000	2,200	0.11	0.22	25,000	1,540	0.088	0.11	20,000	1,100	0.055	0.11
R0.75	2.3	35,000	3,300	0.231	0.462	30,000	3,300	0.165	0.33	30,000	2,750	0.11	0.33	25,000	2,200	0.11	0.22	20,000	1,650	0.066	0.22
R1	3	25,000	3,600	0.308	0.77	25,000	3,300	0.22	0.55	25,000	2,750	0.22	0.55	20,000	2,200	0.165	0.33	16,000	1,650	0.11	0.33
R1.25	3.8	25,000	3,800	0.462	0.77	25,000	3,300	0.33	0.55	25,000	2,750	0.22	0.55	20,000	2,200	0.165	0.44	16,000	1,650	0.11	0.44
R1.5	5	23,590	4,100	0.308	1.232	20,000	3,300	0.22	0.88	18,000	2,750	0.22	0.66	14,000	2,200	0.22	0.55	12,000	1,650	0.132	0.55
R2	6	20,400	4,100	0.462	2.31	20,000	3,300	0.33	1.65	16,000	2,750	0.22	0.88	12,000	2,200	0.22	0.66	9,500	1,650	0.165	0.66

If chatter occurs, adjust cutting conditions as necessary.

Pay particular attention to cutting condition settings and tool passes in areas where cutting load is high, such as corners.

Adjust the number of revolutions and feed rate at the same rate.

Oil mist coolant is recommended.

If ø1mm or L/D (aspect ratio) exceeds 8, adjust cutting conditions as needed.

Long Neck Type

		Prehardened steel NAK(35-45HRC)				Prehardened steel/Hardened steel STAVAX・SKD61(45-55HRC)				Hardened steel SKD11(55-62HRC)				Hardened steel Powder high-speed steel・SKH (62-66HRC)				Hardened steel Powder high-speed steel (66-70HRC)			
Ball Radius RE (mm)	Effective Length L _E (mm)	No. of Revolutions n (min ⁻¹)	Feed V _f (mm/min)	Depth of Cut a _p (mm)	Cutting Width a _e (mm)	No. of Revolutions n (min ⁻¹)	Feed V _f (mm/min)	Depth of Cut a _p (mm)	Cutting Width a _e (mm)	No. of Revolutions n (min ⁻¹)	Feed V _f (mm/min)	Depth of Cut a _p (mm)	Cutting Width a _e (mm)	No. of Revolutions n (min ⁻¹)	Feed V _f (mm/min)	Depth of Cut a _p (mm)	Cutting Width a _e (mm)	No. of Revolutions n (min ⁻¹)	Feed V _f (mm/min)	Depth of Cut a _p (mm)	Cutting Width a _e (mm)
R0.05	0.2	50,000	230	0.005	0.008	40,000	140	0.003	0.006	40,000	110	0.002	0.006	40,000	80	0.002	0.003	40,000	60	0.002	0.003
	0.3	50,000	230	0.005	0.008	40,000	110	0.003	0.006	40,000	80	0.002	0.006	40,000	60	0.002	0.003	40,000	40	0.002	0.003
	0.5	50,000	230	0.003	0.005	40,000	80	0.002	0.003	40,000	60	0.001	0.003	40,000	30	0.001	0.002	40,000	20	0.001	0.002
R0.075	0.3	50,000	280	0.005	0.008	40,000	200	0.003	0.006	40,000	170	0.002	0.006	40,000	110	0.002	0.003	40,000	90	0.002	0.003
	0.5	50,000	280	0.005	0.008	40,000	170	0.003	0.006	40,000	130	0.002	0.006	40,000	80	0.002	0.003	40,000	60	0.002	0.003
	1	46,000	230	0.003	0.005	40,000	80	0.002	0.003	40,000	60	0.001	0.003	40,000	30	0.001	0.002	40,000	20	0.001	0.002
R0.1	0.3	50,000	330	0.015	0.015	40,000	390	0.011	0.011	40,000	330	0.007	0.006	40,000	220	0.003	0.003	40,000	170	0.003	0.003
	0.5	50,000	330	0.012	0.015	40,000	350	0.009	0.011	40,000	310	0.006	0.006	40,000	200	0.003	0.003	40,000	140	0.003	0.003
	0.75	50,000	330	0.008	0.015	40,000	310	0.006	0.011	40,000	220	0.003	0.006	40,000	170	0.002	0.003	40,000	120	0.002	0.003
	1	50,000	330	0.005	0.008	40,000	280	0.003	0.006	40,000	180	0.002	0.003	40,000	130	0.001	0.002	40,000	100	0.001	0.002
	1.25	45,900	270	0.005	0.008	40,000	200	0.003	0.006	40,000	150	0.002	0.003	40,000	110	0.001	0.002	40,000	80	0.001	0.002
	1.5	45,900	270	0.005	0.008	40,000	170	0.003	0.006	40,000	130	0.002	0.003	40,000	90	0.001	0.002	40,000	60	0.001	0.002
R0.15	0.5	50,000	450	0.015	0.023	40,000	390	0.011	0.017	40,000	330	0.008	0.011	40,000	310	0.003	0.006	40,000	220	0.003	0.006
	0.6	50,000	450	0.011	0.015	40,000	390	0.008	0.011	40,000	330	0.006	0.008	40,000	280	0.003	0.006	40,000	200	0.003	0.006
	0.75	50,000	450	0.011	0.015	40,000	360	0.008	0.011	40,000	310	0.006	0.008	40,000	250	0.003	0.006	40,000	190	0.003	0.006
	1	50,000	450	0.011	0.015	40,000	350	0.008	0.011	40,000	280	0.006	0.008	40,000	220	0.003	0.006	40,000	170	0.003	0.006
	1.25	50,000	450	0.008	0.011	40,000	310	0.006	0.008	40,000	220	0.003	0.006	40,000	180	0.002	0.003	40,000	110	0.003	0.006
	1.5	50,000	450	0.008	0.011	40,000	250	0.006	0.008	40,000	200	0.003	0.006	40,000	130	0.002	0.003	40,000	100	0.002	0.003
	1.75	45,900	400	0.005	0.008	40,000	200	0.003	0.006	40,000	170	0.002	0.003	40,000	110	0.002	0.002	40,000	80	0.002	0.002
	2	45,900	370	0.005	0.008	40,000	170	0.003	0.006	40,000	130	0.002	0.003	40,000	100	0.002	0.002	40,000	60	0.002	0.002
R0.2	0.5	50,000	770	0.045	0.113	40,000	880	0.033	0.055	40,000	790	0.033	0.033	40,000	640	0.01	0.022	35,000	460	0.01	0.022
	0.8	50,000	770	0.045	0.113	40,000	880	0.022	0.055	40,000	790	0.022	0.033	40,000	640	0.009	0.022	35,000	460	0.009	0.022
	1	50,000	770	0.042	0.107	40,000	880	0.022	0.055	40,000	790	0.022	0.033	40,000	640	0.009	0.022	35,000	440	0.009	0.022
	1.5	50,000	660	0.035	0.09	40,000	680	0.011	0.033	40,000	550	0.011	0.022	40,000	440	0.006	0.011	35,000	310	0.006	0.011
	2	50,000	550	0.029	0.073	40,000	550	0.011	0.022	40,000	420	0.011	0.011	40,000	330	0.006	0.008	35,000	240	0.006	0.008
	2.5	36,720	360	0.024	0.06	40,000	460	0.008	0.011	40,000	330	0.006	0.008	40,000	290	0.003	0.006	35,000	210	0.003	0.006
	3	36,720	360	0.017	0.043	40,000	330	0.008	0.011	40,000	260	0.006	0.008	40,000	220	0.003	0.006	35,000	190	0.002	0.003
R0.25	1	50,000	1,190	0.046	0.077	40,000	1,100	0.033	0.055	40,000	950	0.022	0.033	40,000	720	0.011	0.022	30,000	500	0.011	0.022
	1.5	50,000	1,190	0.031	0.077	40,000	940	0.022	0.055	40,000	790	0.011	0.033	40,000	570	0.008	0.022	30,000	390	0.008	0.022
	2	50,000	960	0.031	0.046	40,000	790	0.022	0.033	40,000	720	0.011	0.022	40,000	440	0.008	0.011	30,000	300	0.008	0.011
	2.5	45,450	650	0.015	0.031	40,000	660	0.011	0.022	40,000	580	0.008	0.011	40,000	400	0.006	0.008	30,000	260	0.006	0.008
	3	45,450	650	0.015	0.031	40,000	550	0.011	0.022	40,000	460	0.008	0.011	40,000	350	0.006	0.008	30,000	240	0.006	0.008
	3.5	45,000	600	0.011	0.015	40,000	460	0.008	0.011	40,000	400	0.006	0.008	40,000	310	0.003	0.006	30,000	220	0.003	0.006
	4	34,970	500	0.011	0.015	40,000	390	0.008	0.011	40,000	330	0.006	0.008	40,000	290	0.003	0.006	30,000	200	0.003	0.006
R0.3	1	50,000	1,950	0.077	0.154	40,000	1,540	0.055	0.11	40,000	1,100	0.033	0.066	30,000	790	0.022	0.055	25,000	590	0.022	0.055
	1.5	50,000	1,950	0.077	0.154	40,000	1,540	0.055	0.11	40,000	1,100	0.033	0.066	30,000	790	0.022	0.055	25,000	590	0.022	0.055
	2	50,000	1,950	0.077	0.154	40,000	1,540	0.055	0.11	40,000	1,100	0.033	0.066	30,000	790	0.022	0.055	25,000	590	0.022	0.055
	2.5	50,000	1,560	0.046	0.077	40,000	1,320	0.033	0.055	40,000	920	0.022	0.044	30,000	700	0.022	0.033	25,000	530	0.022	0.033

Long Neck Type

		Prehardened steel NAK(35-45HRC)				Prehardened steel/Hardened steel STAVAX・SKD61(45-55HRC)				Hardened steel SKD11(55-62HRC)				Hardened steel Powder high-speed steel・SKH (62-66HRC)				Hardened steel Powder high-speed steel (66-70HRC)			
Ball Radius RE (mm)	Effective Length LU (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)
R0.3	3	50,000	1,560	0.046	0.077	40,000	1,320	0.033	0.055	40,000	920	0.022	0.044	30,000	700	0.022	0.033	25,000	500	0.022	0.033
	3.5	48,960	1,450	0.031	0.046	40,000	1,100	0.022	0.033	40,000	680	0.011	0.033	30,000	530	0.011	0.022	25,000	340	0.011	0.022
	4	48,960	1,450	0.031	0.046	40,000	1,100	0.022	0.033	40,000	680	0.011	0.033	30,000	530	0.011	0.022	25,000	340	0.011	0.022
	4.5	45,900	1,070	0.031	0.046	35,000	990	0.022	0.033	35,000	640	0.011	0.022	30,000	470	0.009	0.017	25,000	250	0.011	0.022
	5	39,780	930	0.015	0.031	30,000	790	0.011	0.022	30,000	550	0.008	0.017	30,000	440	0.008	0.011	25,000	220	0.011	0.022
R0.35	2	50,000	2,160	0.108	0.154	40,000	1,760	0.077	0.11	40,000	1,430	0.055	0.088	30,000	1,100	0.033	0.077	25,000	770	0.022	0.055
	4	48,960	1,600	0.062	0.092	40,000	1,430	0.044	0.066	40,000	900	0.033	0.044	30,000	660	0.017	0.022	25,000	330	0.011	0.022
R0.4	2	50,000	2,400	0.154	0.231	40,000	2,200	0.11	0.165	40,000	1,760	0.077	0.11	30,000	1,320	0.055	0.11	25,000	990	0.033	0.11
	3	50,000	2,400	0.154	0.231	40,000	2,200	0.11	0.165	40,000	1,760	0.077	0.11	30,000	1,320	0.055	0.055	25,000	990	0.033	0.055
	4	50,000	2,400	0.077	0.154	40,000	1,760	0.055	0.11	40,000	1,320	0.055	0.055	30,000	950	0.033	0.055	20,000	700	0.022	0.055
	5	48,960	2,110	0.077	0.077	40,000	1,760	0.055	0.055	40,000	1,100	0.033	0.055	30,000	680	0.022	0.033	20,000	510	0.017	0.033
	6	42,840	1,730	0.046	0.077	30,000	1,320	0.033	0.055	30,000	840	0.022	0.033	25,000	620	0.011	0.022	20,000	330	0.017	0.033
R0.45	2	50,000	2,820	0.154	0.308	40,000	2,420	0.11	0.22	30,000	1,980	0.088	0.165	30,000	1,430	0.066	0.11	25,000	990	0.033	0.055
	4	48,450	2,370	0.077	0.185	40,000	1,980	0.055	0.132	30,000	1,540	0.044	0.088	25,000	990	0.033	0.055	20,000	660	0.017	0.028
	6	40,700	1,520	0.054	0.077	30,000	1,320	0.039	0.055	25,000	880	0.028	0.039	20,000	660	0.017	0.028	20,000	330	0.011	0.022
R0.5	2	45,900	3,100	0.154	0.462	40,000	2,750	0.11	0.33	30,000	2,200	0.11	0.22	25,000	1,540	0.088	0.11	20,000	1,100	0.055	0.11
	2.5	45,900	3,100	0.154	0.462	40,000	2,750	0.11	0.33	30,000	2,200	0.11	0.22	25,000	1,540	0.088	0.11	20,000	1,100	0.055	0.11
	3	45,900	3,100	0.154	0.462	40,000	2,750	0.11	0.33	30,000	2,200	0.11	0.22	25,000	1,540	0.088	0.11	20,000	1,100	0.055	0.11
	4	45,900	3,100	0.154	0.308	40,000	2,750	0.11	0.22	30,000	1,980	0.055	0.165	25,000	1,320	0.055	0.11	20,000	990	0.033	0.11
	5	39,780	2,600	0.077	0.231	30,000	2,200	0.055	0.165	25,000	1,760	0.044	0.11	20,000	1,010	0.033	0.055	16,000	770	0.022	0.055
	6	38,560	2,320	0.077	0.154	30,000	1,980	0.055	0.11	25,000	1,320	0.044	0.055	20,000	810	0.022	0.055	16,000	610	0.017	0.055
	7	33,050	1,340	0.062	0.092	30,000	1,320	0.044	0.066	25,000	1,050	0.033	0.044	20,000	750	0.022	0.033	16,000	540	0.011	0.033
R0.6	2.4	39,230	2,720	0.154	0.462	30,000	2,750	0.11	0.33	30,000	2,200	0.11	0.22	25,000	1,760	0.055	0.11	20,000	1,320	0.055	0.11
	4	39,230	2,720	0.154	0.308	30,000	2,750	0.11	0.22	30,000	2,200	0.077	0.22	25,000	1,760	0.055	0.11	20,000	1,320	0.055	0.11
	6	39,230	2,720	0.108	0.154	30,000	2,200	0.077	0.11	25,000	1,760	0.055	0.11	20,000	1,320	0.033	0.077	16,000	830	0.022	0.077
	8	31,820	2,070	0.077	0.154	30,000	1,760	0.055	0.11	25,000	1,320	0.033	0.077	20,000	1,010	0.022	0.055	16,000	720	0.017	0.055
R0.7	8	27,850	1,810	0.185	0.308	30,000	2,750	0.132	0.22	20,000	1,980	0.088	0.165	20,000	1,100	0.033	0.088	15,000	680	0.022	0.055
	12	25,700	1,250	0.108	0.185	20,000	1,540	0.077	0.132	18,000	1,210	0.044	0.088	18,000	770	0.017	0.055	15,000	620	0.017	0.05
R0.75	3	35,700	3,210	0.231	0.462	30,000	3,300	0.165	0.33	30,000	2,750	0.11	0.33	25,000	2,200	0.11	0.22	20,000	1,650	0.066	0.22
	4	35,700	3,210	0.231	0.462	30,000	3,300	0.165	0.33	30,000	2,750	0.11	0.33	25,000	2,200	0.11	0.22	18,000	1,320	0.066	0.22
	6	35,700	3,210	0.231	0.308	30,000	3,300	0.165	0.22	30,000	2,200	0.11	0.22	25,000	1,760	0.11	0.11	16,000	1,050	0.066	0.11
	8	27,850	1,810	0.154	0.308	25,000	2,750	0.11	0.22	25,000	1,760	0.055	0.22	20,000	1,320	0.055	0.11	13,000	770	0.033	0.11
	10	25,700	1,670	0.154	0.154	25,000	2,750	0.11	0.11	25,000	1,320	0.055	0.11	20,000	950	0.055	0.055	13,000	720	0.033	0.055
	12	25,700	1,390	0.077	0.154	20,000	1,980	0.055	0.11	20,000	1,010	0.033	0.11	18,000	860	0.022	0.055	10,000	500	0.017	0.033
R0.8	8	30,940	2,490	0.154	0.308	25,000	2,750	0.11	0.22	20,000	2,200	0.077	0.165	18,000	1,760	0.055	0.11	13,000	830	0.033	0.11
	12	27,850	2,180	0.108	0.154	20,000	1,980	0.077	0.11	16,000	1,650	0.055	0.077	14,000	1,320	0.033	0.055	10,000	500	0.022	0.055

Long Neck Type

		Prehardened steel NAK(35-45HRC)				Prehardened steel/Hardened steel STAVAX·SKD61(45-55HRC)				Hardened steel SKD11(55-62HRC)				Hardened steel Powder high-speed steel·SKH (62-66HRC)				Hardened steel Powder high-speed steel (66-70HRC)			
Ball Radius RE (mm)	Effective Length LU (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)	No. of Revolutions n (min ⁻¹)	Feed Vf (mm/min)	Depth of Cut ap (mm)	Cutting Width ae (mm)
R1	3	26,780	3,620	0.308	0.77	25,000	3,300	0.22	0.55	25,000	2,750	0.22	0.55	20,000	2,200	0.165	0.33	16,000	1,650	0.11	0.33
	4	26,780	3,620	0.308	0.77	25,000	3,300	0.22	0.55	25,000	2,750	0.22	0.55	20,000	2,200	0.165	0.33	16,000	1,650	0.11	0.33
	6	26,780	3,210	0.308	0.77	25,000	2,750	0.22	0.55	25,000	2,200	0.22	0.33	20,000	1,760	0.165	0.33	16,000	1,320	0.11	0.33
	8	26,780	3,210	0.308	0.462	20,000	2,200	0.22	0.33	18,000	1,760	0.11	0.22	16,000	1,320	0.11	0.22	13,000	1,050	0.066	0.165
	10	24,990	2,700	0.154	0.462	18,000	2,200	0.11	0.33	16,000	1,760	0.11	0.22	14,000	1,320	0.11	0.11	11,000	830	0.066	0.11
	12	22,490	2,430	0.154	0.308	16,000	1,760	0.11	0.22	14,000	1,320	0.11	0.11	12,000	1,030	0.055	0.11	9,500	720	0.033	0.11
	13	22,490	2,430	0.123	0.308	16,000	1,760	0.088	0.22	14,000	1,320	0.066	0.11	12,000	1,030	0.044	0.088	9,500	610	0.033	0.055
	14	22,490	2,110	0.108	0.231	16,000	1,760	0.077	0.165	14,000	1,320	0.055	0.088	12,000	1,030	0.033	0.077	8,500	500	0.033	0.055
	16	20,890	1,350	0.108	0.231	16,000	1,760	0.077	0.165	14,000	1,320	0.055	0.088	12,000	1,030	0.033	0.077	8,000	390	0.033	0.055
R1.25	6	23,590	3,800	0.462	0.616	20,000	3,080	0.33	0.44	20,000	2,530	0.22	0.55	18,000	2,200	0.165	0.44	14,000	1,650	0.11	0.44
	8	23,590	3,800	0.385	0.462	20,000	2,860	0.275	0.33	20,000	2,310	0.165	0.33	18,000	1,980	0.132	0.275	14,000	1,430	0.11	0.33
	10	23,590	3,800	0.308	0.462	20,000	2,750	0.22	0.33	20,000	2,200	0.165	0.22	18,000	1,760	0.11	0.165	13,000	1,210	0.066	0.165
	15	18,400	2,130	0.154	0.308	18,000	2,200	0.11	0.22	16,000	1,760	0.077	0.165	14,000	1,320	0.055	0.11	9,500	770	0.033	0.11
	20	16,980	1,640	0.108	0.231	16,000	1,650	0.077	0.165	14,000	1,320	0.055	0.11	10,000	1,100	0.033	0.055	8,500	500	0.033	0.055
R1.5	6	23,590	4,100	0.308	1.232	20,000	3,300	0.22	0.88	18,000	2,750	0.22	0.66	14,000	2,200	0.22	0.55	12,000	1,650	0.132	0.55
	8	23,590	4,100	0.308	1.232	20,000	3,300	0.22	0.88	18,000	2,750	0.22	0.66	14,000	2,200	0.22	0.55	12,000	1,650	0.132	0.55
	10	23,590	4,100	0.308	0.924	20,000	2,750	0.22	0.66	18,000	2,200	0.22	0.44	14,000	1,650	0.11	0.33	12,000	1,430	0.11	0.33
	12	23,590	3,400	0.308	0.924	20,000	2,750	0.22	0.66	18,000	2,200	0.22	0.44	14,000	1,650	0.11	0.33	12,000	1,210	0.066	0.33
	14	19,040	2,700	0.154	0.616	18,000	2,200	0.11	0.44	16,000	1,760	0.11	0.33	12,000	1,320	0.11	0.22	10,000	990	0.066	0.22
	16	19,040	2,300	0.154	0.616	18,000	2,200	0.11	0.44	16,000	1,760	0.11	0.33	12,000	1,320	0.11	0.22	10,000	720	0.066	0.22
	20	15,910	1,920	0.154	0.462	18,000	1,760	0.11	0.33	16,000	1,320	0.11	0.22	12,000	1,050	0.11	0.11	9,500	500	0.066	0.11
	25	15,910	1,390	0.154	0.308	16,000	1,320	0.11	0.22	14,000	1,200	0.077	0.165	10,000	880	0.055	0.077	8,500	300	0.053	0.088
R1.75	15	23,590	2,750	0.385	1.54	20,000	3,300	0.275	1.1	16,000	2,530	0.165	0.55	14,000	1,650	0.143	0.44	12,000	990	0.143	0.422
	20	19,040	2,100	0.278	0.924	18,000	2,750	0.198	0.66	15,000	1,980	0.11	0.33	12,000	1,320	0.11	0.22	9,500	720	0.11	0.22
	25	15,910	1,710	0.186	0.539	16,000	1,980	0.132	0.385	14,000	1,760	0.11	0.22	10,000	1,100	0.066	0.132	8,500	500	0.066	0.132
	30	15,190	1,710	0.154	0.385	14,000	1,650	0.11	0.275	11,000	1,050	0.077	0.165	9,000	880	0.055	0.088	7,500	300	0.055	0.088
R2	8	20,400	4,100	0.462	2.31	20,000	3,300	0.33	1.65	16,000	2,750	0.22	0.88	12,000	2,200	0.22	0.66	9,500	1,650	0.165	0.66
	10	20,400	4,100	0.462	2.31	20,000	3,300	0.33	1.65	16,000	2,750	0.22	0.88	12,000	2,200	0.22	0.66	9,500	1,650	0.165	0.66
	12	20,400	4,100	0.462	2.31	20,000	3,300	0.33	1.65	16,000	2,750	0.22	0.88	12,000	2,200	0.22	0.66	9,500	1,650	0.165	0.66
	14	20,400	3,900	0.462	2.31	20,000	3,300	0.33	1.65	16,000	2,200	0.22	0.88	12,000	1,760	0.22	0.66	9,500	1,320	0.132	0.66
	15	20,400	3,900	0.462	2.31	20,000	3,300	0.33	1.65	16,000	2,200	0.22	0.88	12,000	1,760	0.22	0.66	9,500	1,320	0.132	0.66
	20	15,910	2,800	0.308	1.54	16,000	2,640	0.22	1.1	14,000	1,980	0.11	0.66	10,000	1,540	0.11	0.44	8,000	990	0.088	0.44
	25	15,910	1,900	0.308	1.232	16,000	1,760	0.22	0.88	14,000	1,320	0.11	0.44	10,000	1,100	0.11	0.22	8,000	720	0.088	0.22
	30	15,190	1,800	0.154	0.462	14,000	1,760	0.11	0.33	10,000	1,310	0.077	0.22	8,200	1,100	0.055	0.165	6,500	500	0.07	0.176
	35	14,000	1,370	0.154	0.308	14,000	1,320	0.11	0.22	10,000	1,100	0.077	0.165	8,200	900	0.055	0.11	6,500	300	0.07	0.176

If chatter occurs, adjust cutting conditions as necessary.

Pay particular attention to cutting condition settings and tool passes in areas where cutting load is high, such as corners.

Adjust the number of revolutions and feed rate at the same rate.

Oil mist coolant is recommended.

If $\phi 1$ mm or L/D (aspect ratio) exceeds 8, adjust cutting conditions as needed.



Born from a commitment to balance diverse requirements, the K-series creates innovative, comprehensive solid tool solutions.

Kyocera constantly pushes technological boundaries to benefit society.

Let your products' potential shine with inspiring innovation.

