



KK270P-3CD3CG

HIGH EFFICIENCY MULTICRYSTALLINE PHOTOVOLTAIC MODULE

IEC 61215Ed.2
EN61730



This module has passed 2,400Pa mechanical load test based on IEC61215 ed.2
This module is manufactured in ISO9001 certified factories.
Registered No.: JMI0036 (Japan), CN07/00321 (China), FM26856 (Mexico)
TUV.COM Internet platform for tested quality and service ID 0000023299.

HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities produce highly efficient multi crystalline photovoltaic modules.

The conversion efficiency of the Kyocera solar cell is over 18.4%.

These cells are encapsulated between a tempered glass cover and a EVA pottant with back sheet to provide efficient protection from severe environmental conditions.

The entire laminate is installed an anodized aluminum frame to provide structural strength and ease of installation.

Equipped with plug in connectors.

APPLICATIONS

Grid-Connected Systems

- Residential Solar Power Systems
- Public and Industrial Solar Power Systems

Stand -Alone Solar Power Systems for

- Villages in remote areas
- Homes and summer cottages

- Microwave/Radio repeater stations
- Medical facilities in rural areas
- Emergency communication
- Water quality and environmental data monitoring
- Drinking and livestock water pumping
- Irrigation pumping

- Cathodic protection
- Aviation obstruction lighting
- Environmental data monitoring
- Railway signals
- Street lighting
- Desalination

LIMITED WARRANTY


*Limited warranty on material and workmanship: For warranty period, please refer to Warranty issued by Kyocera

*25years limited warranty on power output: For detail, please refer to "category V" in Warranty issued by Kyocera


(Long term output warranty shall warrant if PV Module(s) exhibits power output of less than 90% of the original minimum rated power specified at the time of sale within 10 years and less than 80% within 25 years after the date of sale the Customer. The power output values shall be those measured under Kyocera's standard measurement conditions. Regarding the warranty conditions in detail, please refer to Warranty issued by Kyocera)

ELECTRICAL CHARACTERISTICS


Current-Voltage characteristics of Photovoltaic Module KK270P-3CD3CG at various cell temperatures at Kyocera Corporation laboratory.

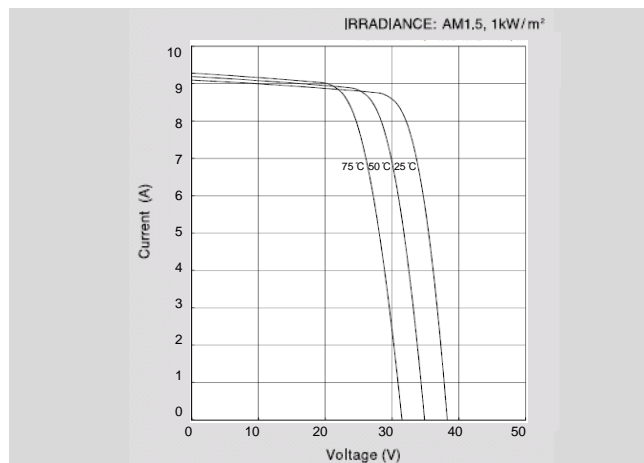

Current-Voltage characteristics of Photovoltaic Module KK270P-3CD73CG at various irradiance levels at Kyocera Corporation laboratory.

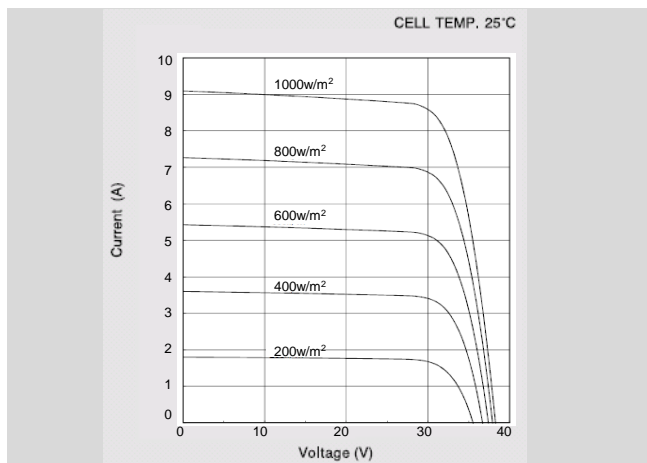

Physical Specifications

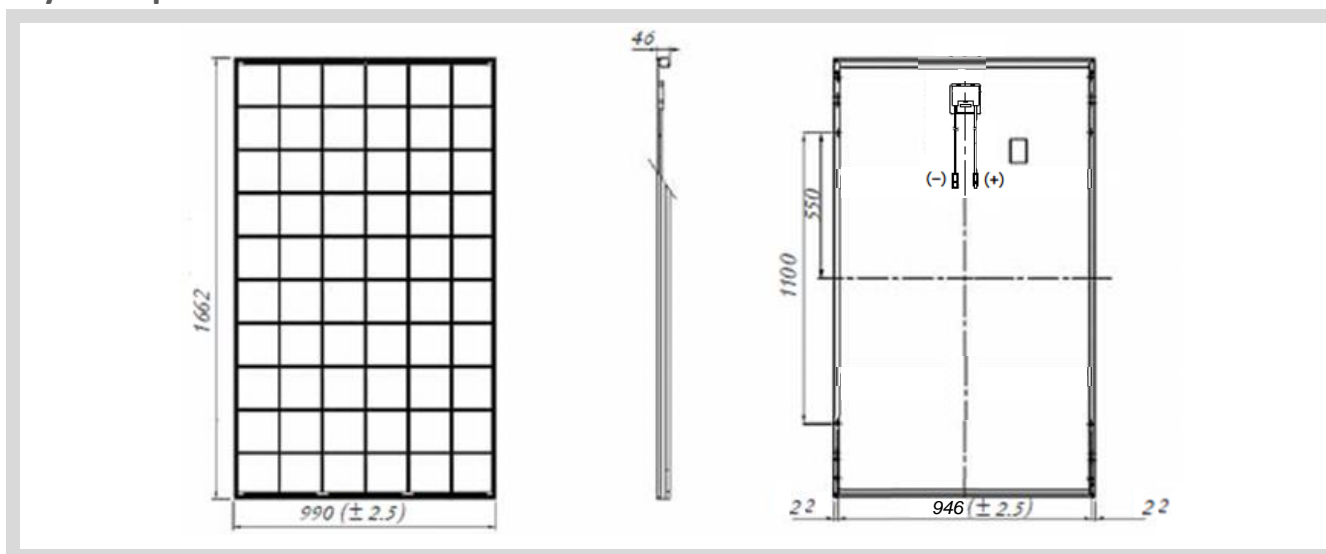

Specifications

Module Efficiency 16.4%	KK270P-3CD3CG
Electrical Performance under Standard Test Conditions (STC*)	
Maximum Power (Pmax)	270 W (+5%, -3%)
Maximum Power Voltage (Vmpp)	31.0 V
Maximum Power Current (Impp)	8.71 A
Open Circuit Voltage (Voc)	38.3 V
Short Circuit Current (Isc)	9.43 A
Max System Voltage	1000 V
Temperature Coefficient of Voc	-1.36 x 10 ⁻¹ V/°C
Temperature Coefficient of Isc	5.43 x 10 ⁻³ A/°C
*STC: Irradiance 1000W/m ² , AM1.5 spectrum, module temperature 25°C	
Electrical Performance at 800W/m², NOCT*, AM1.5	
Maximum Power (Pmax)	194W
Maximum Power Voltage	27.9 V
Maximum Power Current	6.96 A
Open Circuit Voltage (Voc)	35.1 V
Short Circuit Current (Isc)	7.63 A
*NOCT (Nominal Operating Cell Temperature): 45°C	
Cells	
Number per Module	60
Cell Technology	Multi crystalline
Module Characteristics	
Length x Width x Depth without Box	1662 x 990 x 46 mm
Weight	19.0 kg
Cable	(+)1200 / (-) 1200 mm
Junction Box Characteristics	
Length x Width x Depth	111 x 90 x 15.9 [mm]
IP Code	IP 67
Others	
Reduction*	3.3 %
Limiting Reverse Current	15 A
Mechanical load (to IEC61215 ed.2)	Pressure 2400 Pa

KYOCERA Corporation

Headquarters

Corporate Solar Energy Group

6 Takeda Tobadono-cho Fushimi-ku, Kyoto

612-8501, Japan

TEL: 81-75-604-3476

<http://www.kyocera.com/>

KYOCERA Asia Pacific Pte. Ltd.

298 Tiong Bahru Road, #13-03/05

Central Plaza, 168730, Singapore

TEL: 65-6271-0500

<http://www.kyocera.com.sg>